






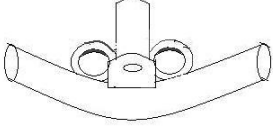











8x20m TENT

Dimention		No.	Quantity			
50X1.4MM 1483MM		1	22			
38x1.20mm 1916mm		2	78			
50X1.5MM 1960MM		3	44			
25x1.0mm 750mm		4	11			
25x1.0mm 1987mm		5	22			
50X1.5MM 1483mm		6	22			
110 ° Three-way connector 54-42mm		7	4			
140 ° Three-way connector 54-42mm		8	2			
140 ° Four-way connector 54-42mm		9	9			
110 ° Four-way connector 54-42mm		10	18			








8x20m TENT

Flat Threeway connector 54-42mm		11	4			
Flat fourway connector 54-42mm		12	18			
Foot base for corner on right		13	2			
Foot base for corner on left		14	2			
Foot base for sidewall		15	18			
Foot base for sidewall		16	6			
Turnbuckle set for side(short)		17	20			

8x20m TENT

Turnbuckle set for roof(long)		18	20			
Supper pipe peg			22			
Spiral peg			4			
8x300mm			22			
4x180mm			82			
Long bungeeball			380			
Short bungeeball			20			
rope			4			
hook			22			
Allan key			1			


8x20m TENT

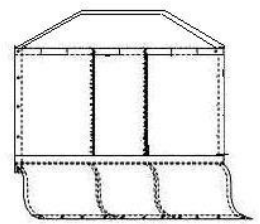M6x30 screw with wing nut			44			
M8x50mm screw			156			
M8x70mm screw			156			
locknut			312			
spancer			2			
roof			1			
sidewall			20			
endwall			2			


8x20m TENT

I

Select a flat ground for the tent, unpack the carton and check all the parts including tubes, tent and accessories... etc. are present as same as list.
Assemble the framework of rooftop by joining the portion (7.8.9.10.11.12.) together with poles (2.3). To ensure the screw fixed to every pole tightly

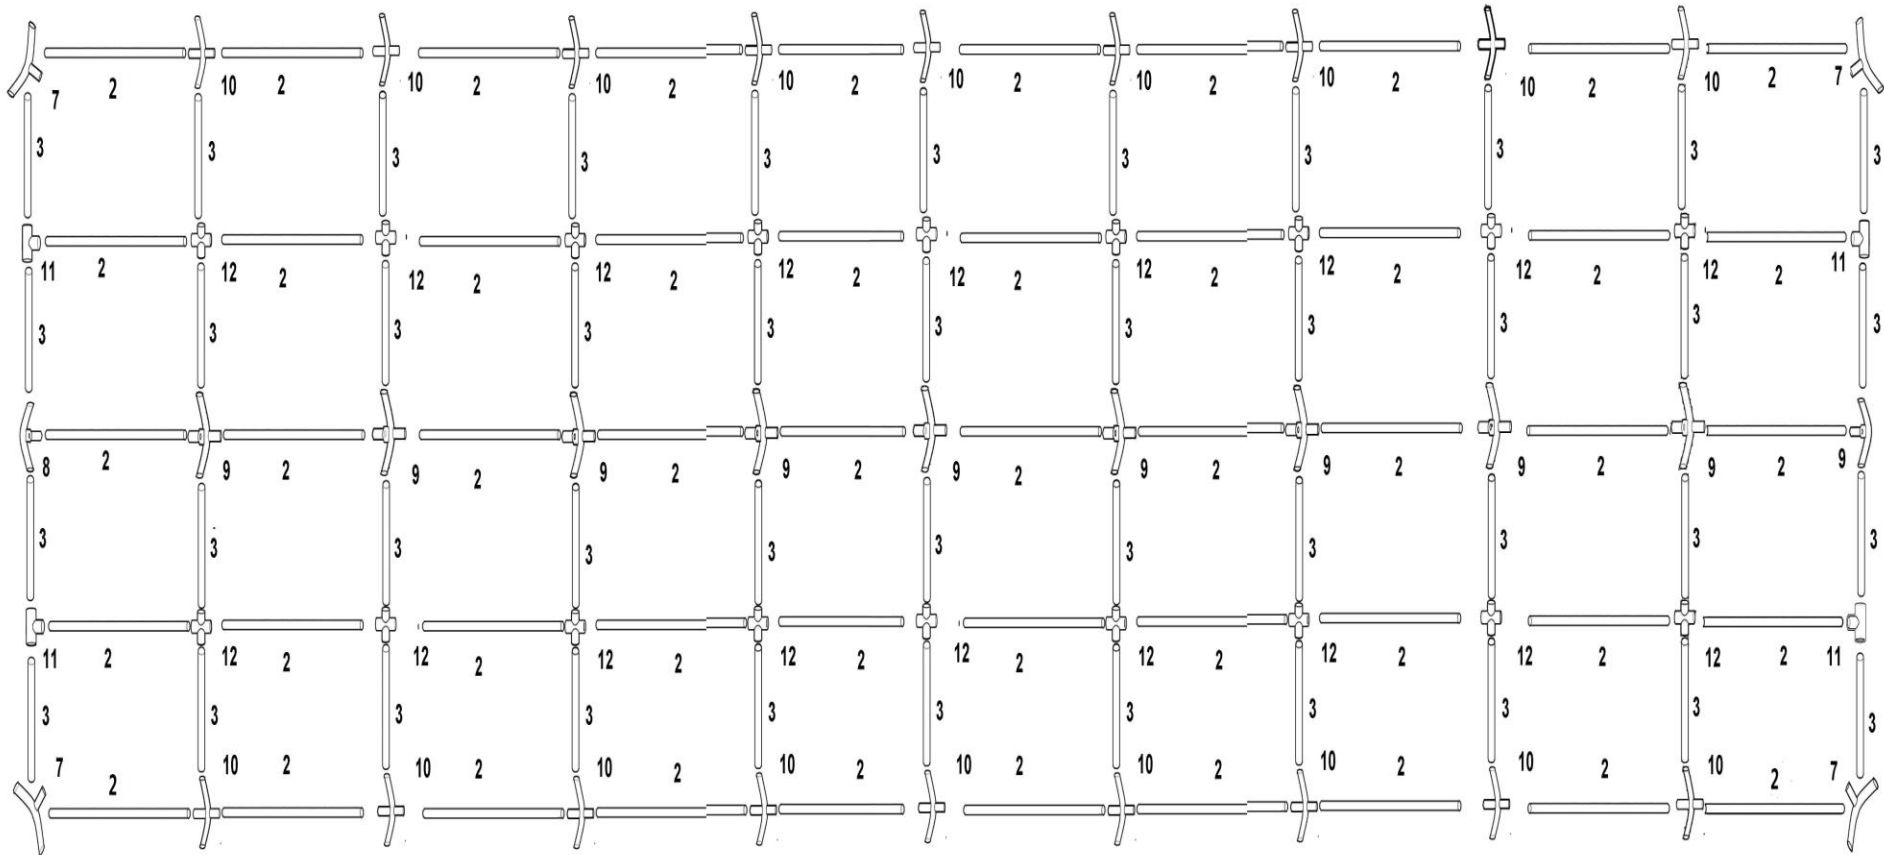


8x20m TENT

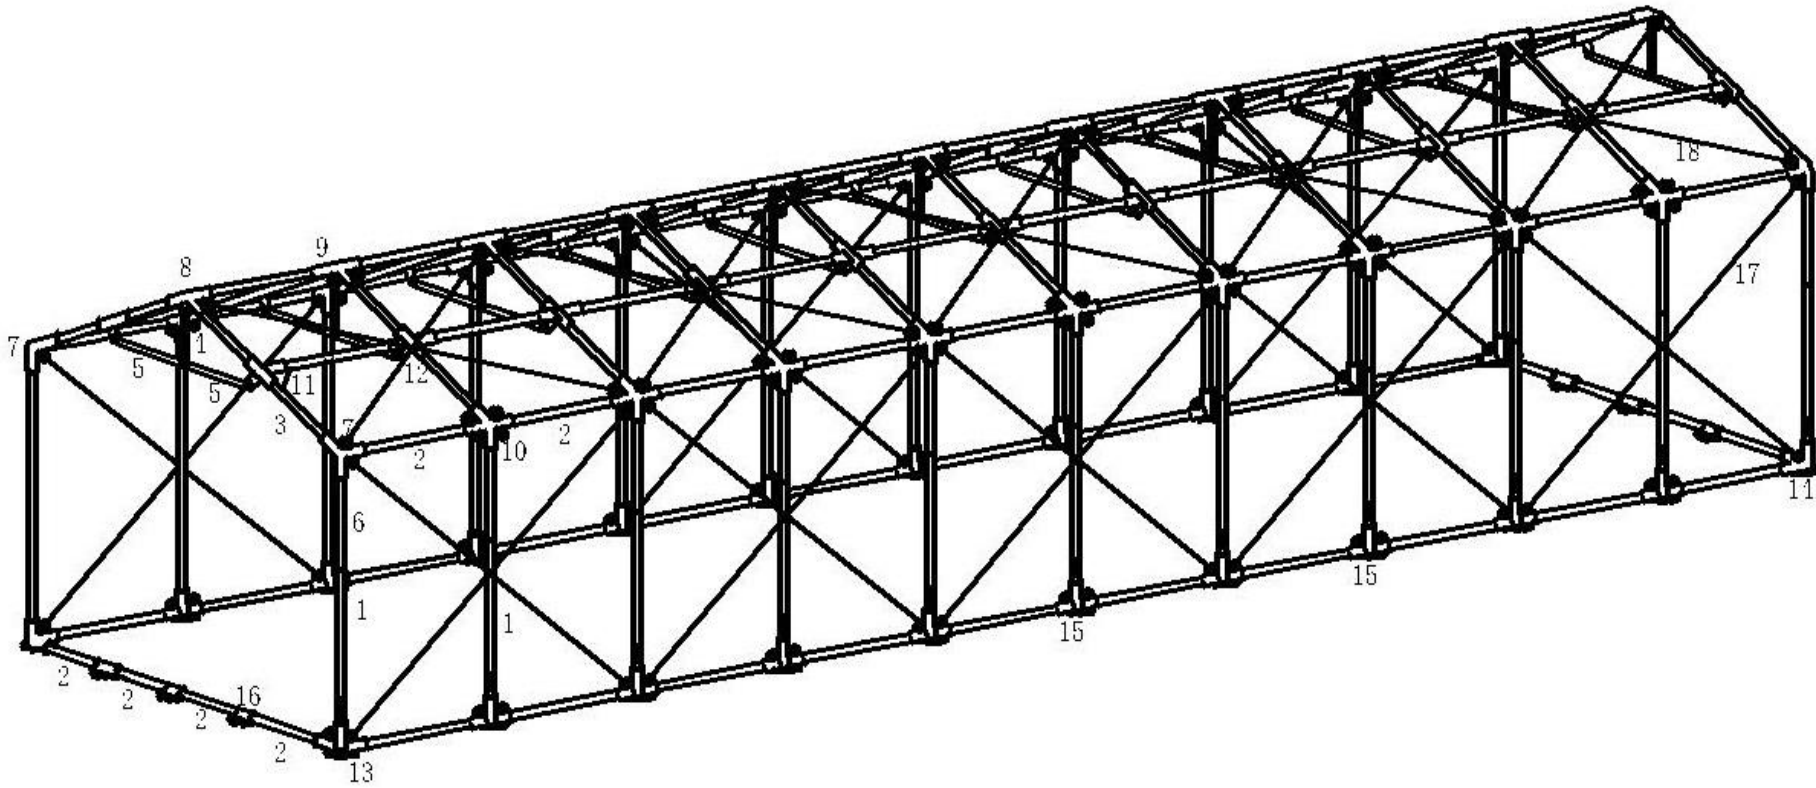


8x20m TENT

II

Attach one end of supported pole (4.5) to the joints (8.11)

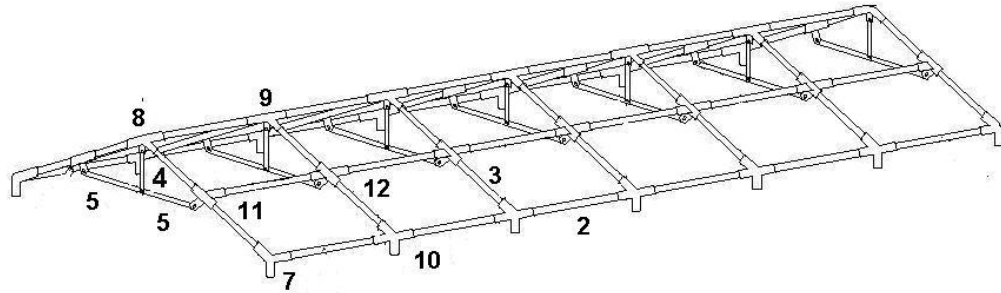


Fastening the roof by using turnbuckle set(18) which is diagonally across through each two section as below .

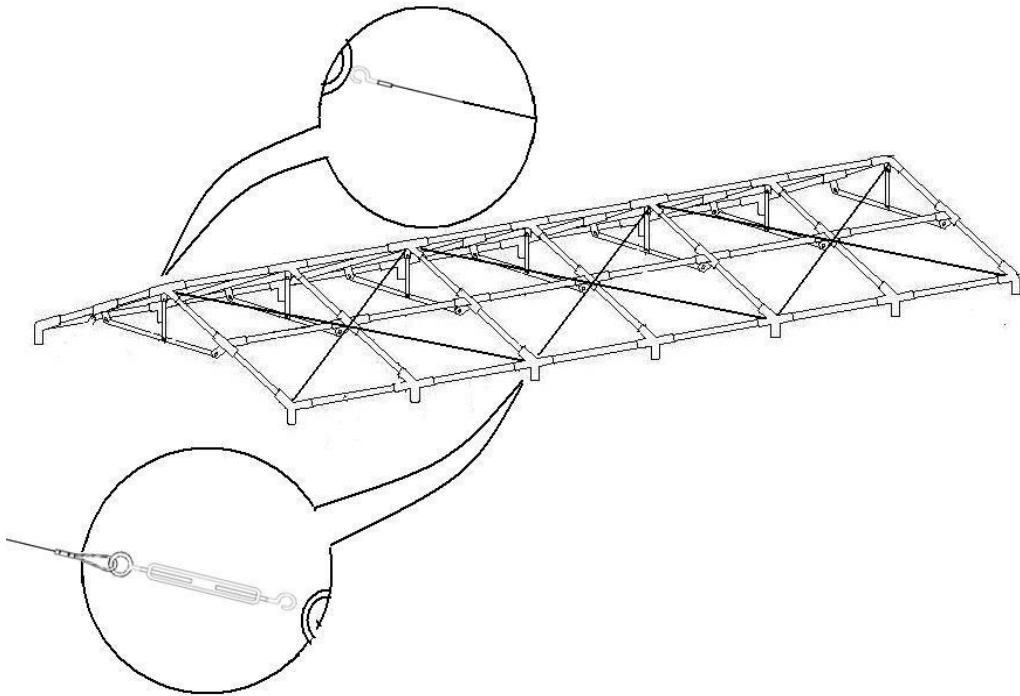

8x20m TENT

III


Cover the roof on the frame ,and attach it by the bungee balls properly ,take care of the tension of the bungee balls ,for if you use too many on one side of tent ,it may too tight to tie the other side of it . Attach leg 6 with Leg 1, and leg 6 is upper position, then raise up one side of the top, insert the legs.

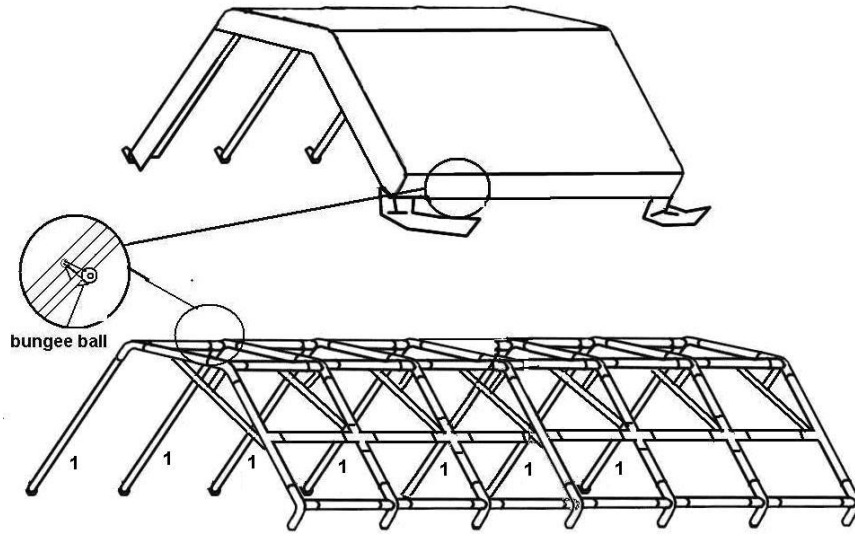

8x20m TENT

IV


Attach the another 7 supported poles (1,6) to the joints (7.10), built-up the framework , first set up the tent, so the position of 13, 14, 15, 16 is accurate, then set up the supper pipe peg beside those bottom ground bar connectors, use peg 8x300mm go through the hold of the supper pipe peg and the hole of connector .Using turnbuckle sets (17) to fasten the structure just the same as you do on roof .Note: Hammer is needed when you put supper peg into ground.

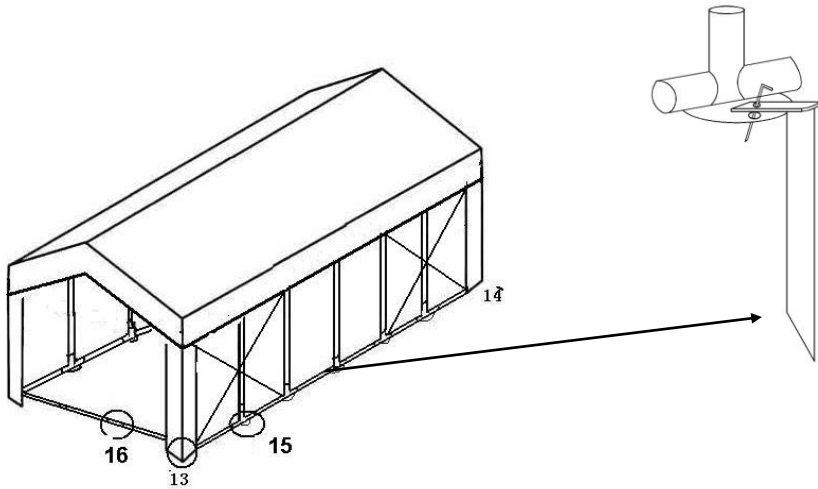

8x20m TENT


V

spread the wall panel and door panel attach to framework by using the bungee cords clasp the frame to grommets that is construct over the wall panel and door panel to ensure stability. Also use the short pegs to fix the doors to the ground .

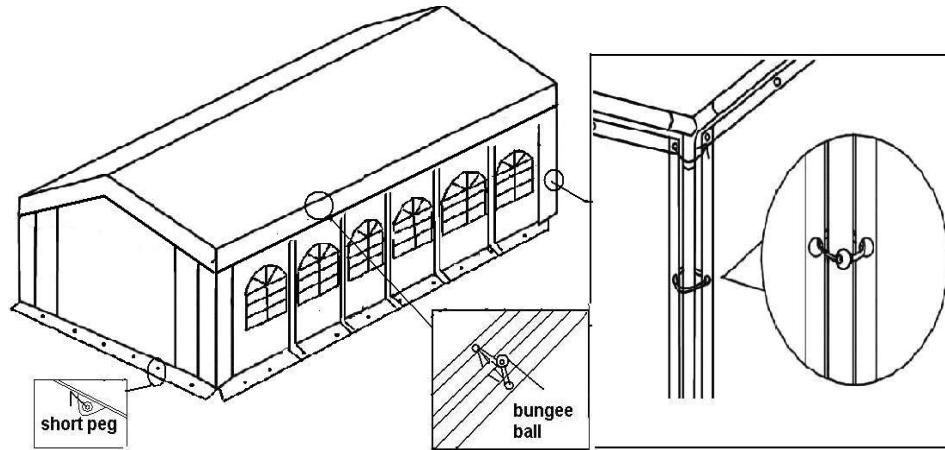

VI

The Guy lines clasp to each corner of tent and another end of line fix to ground by pegs.

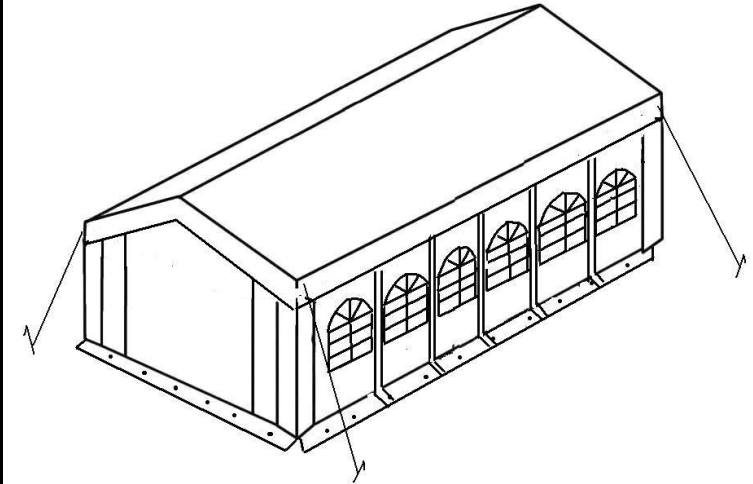

Warning

1. In order to avoid being rusted by air ,oil is covered on the surface of the pipes ,before set up the tent ,please remove the oil carefully frist to keep the cover clean.
2. Take note that the tent needs to be handled carefully to avoid damage.
3. Do not force the frame as they may be damage in the process.
4. Tents are meant as temporary shelter and must be evacuated under extreme weather conditions.

Please select a suitable site for the tent to avoid the damage to underground sprinkler systems, water, gas or electrical lines.